


CLASSIC 3D 80 ARMS

Functions

They enable tilt-and-turn opening in conjunction with the mechanisms and are available in three versions (standard, microventilation and logic).

Materials


Body, fixing block and slider in zamak with GS Silver Plus finish (up to 500 h of corrosion resistance).
Rod, connecting bracket, grub screws and screws in stainless steel. Stop disk in polyamide.




Online data sheet




04329




04330

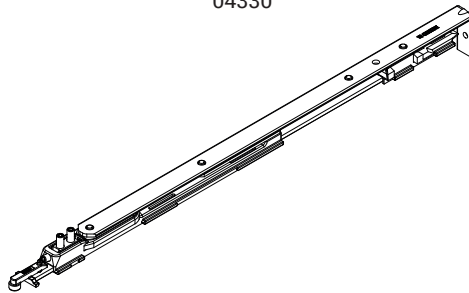


04339

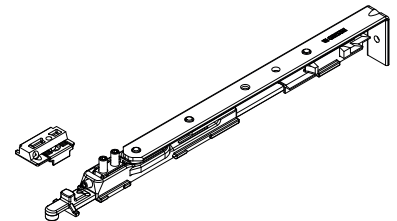

04340

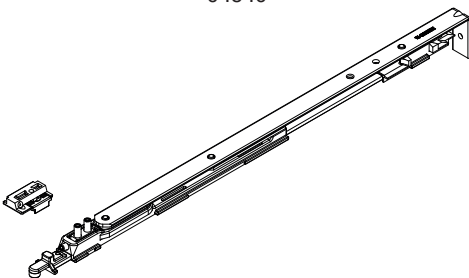

04352

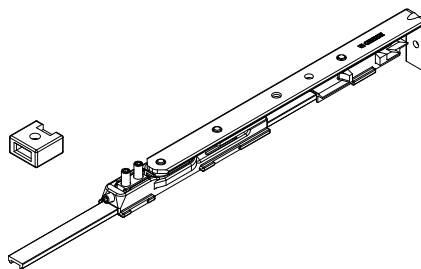

Sash opening



Item code	Description	PROFILE CROSS - SECTION	Range (mm)	Version	A (mm)	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
04329	ARM TYPE 1 T/T CLASSIC 3D 80 LOGICA	C001-C002-C003-C005	W 390 ÷ 1300	Logica	110	X				10
04330	ARM TYPE 2 T/T CLASSIC 3D 80 LOGICA	C001-C002-C003-C005	W 550 ÷ 1700	Logica	180	X				10
04339	ARM TYPE 1 T/T CLASSIC 3D 80 MICRO	C001-C002-C003-C005	W 410 ÷ 1300	Micro	110	X				10
04340	ARM TYPE 2 T/T CLASSIC 3D 80 MICRO	C001-C002-C003-C005	W 570 ÷ 1700	Micro	180	X				10
04352	ARM TYPE 0 T/T CLASSIC 80	C001-C002-C003-C005	W 350 ÷ 410	-	110	X				10