


## LIMITY ARMS



### Functions

Accessory utilised to limit opening of the sash when movement of the sash is restricted by obstacles such as uprights or walls.

Online data sheet





### Technical Features



Sliding plate friction adjustable by means of grub screw provided.  
Can be fitted to side-hung or tilt-and-turn casements.  
Equipped with a spring-loaded manual quick release.  
Stop plate fitted with two grub screws to prevent slippage.

### Materials

Stainless steel arm  
Stainless steel spring lever  
Pins, washers and grub screw in stainless steel  
GS SILVER PLUS frame coupling cam and frame striker in zamak  
Fibreglass reinforced polyamide slider  
Extruded aluminium stop plate



Minimum width

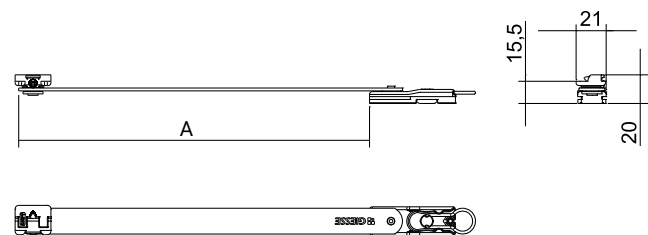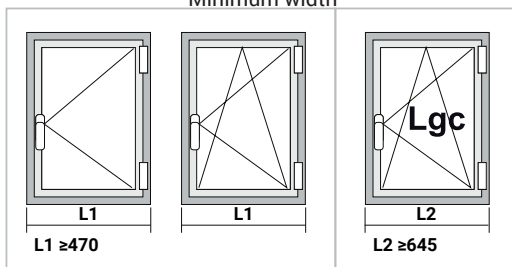

Item code	Description	PROFILE CROSS - SECTION	A (mm)	L1 (mm)	L2 (mm)	$\alpha^\circ$	Load capacity as limiter (kg)	Base Raw	Items per pack
02038	LIMITY ARM	C001-C004-C013-C015-C016	250	470	645	120°	80	X	10
02039	LIMITY ARM	C001-C004-C013-C015-C016	150	325	500	90°	80	X	10