

SASH GIAP BOLTS



Functions

Polyamide bolt composed of an actuator and terminal with pin for direct fixing to the floor.
Ideal for side-hung doors and windows in aluminium with central gasket.

Online data sheet



Technical Features

For the fixing where mounting is required in conjunction with the rod strikers, you will have to engage the supplied polyamide adjustable bush on the pin to achieve a perfect coupling.


Fits to the profile groove without any machining. Once positioned, secures with a block by tightening the pre-assembled M5 grub screw, with a 2.5 mm Allen key.

The polyamide connection plate can be replaced by the series rod to extend the mechanism.


Materials

Basic parts in fibreglass loaded polyamide
Terminal pin of zinc-nickel plated steel
Fixing block in Zamak
Stainless steel grub screw


Type 1




Type 3




Type 4



Type 5

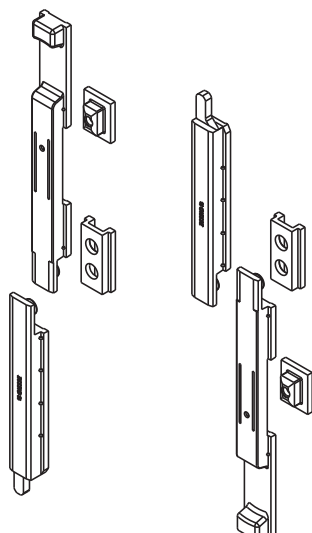


Type 6

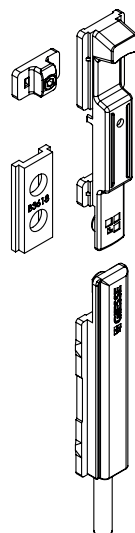

WINDOW BOLTS

adjustment

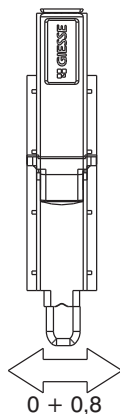

Item code	Description	Type	Groove (mm)	Adjustment (mm)	Discharged terminal	Offset terminal	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
02108	GIAP BOLT	3	15 ÷ 20	+ 0,8	YES	-	X				50
02108K	GIAP BOLT	3	15 ÷ 20	+ 0,8	YES	-	X				50
02111K	GIAP BOLT	4	15 ÷ 20	+ 0,8	-	-	X				50
02111N	GIAP BOLT	4	15 ÷ 20	+ 0,8	-	-	X				50
02112	GIAP BOLT	4	13,2 ÷ 16,8	+ 0,8	-	-	X				50
02112K	GIAP BOLT	4	13,2 ÷ 16,8	+ 0,8	-	-	X				50
02121	GIAP BOLT	4	15 ÷ 20	-	-	-	X				20
02125	GIAP BOLT	4	14 ÷ 18	+ 0,8	-	-	X				50
02125K	GIAP BOLT	4	14 ÷ 18	+ 0,8	-	-	X				50
02131	GIAP BOLT	5	15 ÷ 18	-	-	-	X				25
02131K	GIAP BOLT	5	15 ÷ 18	-	-	-	X				25
02132	GIAP BOLT	5	20 ÷ 23	-	-	-	X				25
02133	GIAP BOLT	4	23,6 ÷ 31	+ 0,8	-	-	X				50
02134	GIAP BOLT	5	20 ÷ 23	-	-	-	X				25
02138K	GIAP BOLT	3	13,2 ÷ 16,8	+ 0,8	YES	-	X				50
02164	GIAP BOLT	6	15 ÷ 20	-	-	YES	X				25
02165	GIAP MECHANISM	1	15 ÷ 20	-	-	-	X				50
02165K	GIAP MECHANISM	1	15 ÷ 20	-	-	-	X				50