

FRONTAL APPLICATION DOOR HINGES

BRIDGE HINGES



Functions

Front mounting clamp hinge, for lightweight doors and windows.

Online data sheet



Technical Features

With a completely removable pin, the sash can be separated from the frame without detaching the hinge from the profile.

The pin is held fast internally of the hinge body by a grub screw, accessible only when the sash is open.

Fixing to the hinge is by means of the plates, supplied with the hinge, which are inserted into the hollow section and/or the shoulder of the profile.

The profile is drilled with the aid of template item 03218.

Materials

Extruded aluminium hinge bodies

Pin, fixing plates, screws and grub screw, all stainless steel

Acetal resin bushes

Parts

2 fixing plates



6 TPS M5x10 screws

1 Grub screw M5x6


Capacities

75 kg with 2 hinges

85 kg with 3 hinges

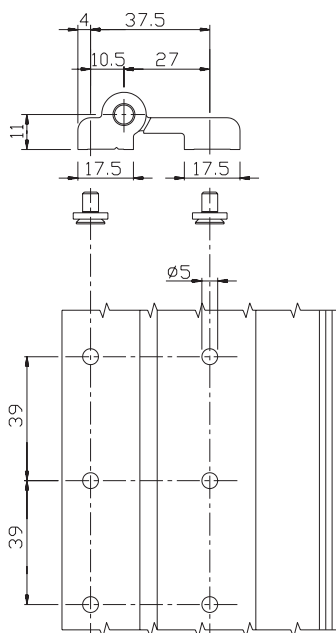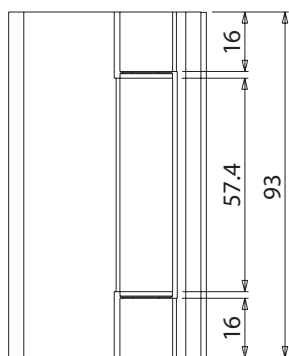

Profile machining template item 03218

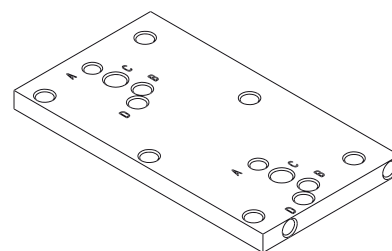

Item code	Description	Note	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
00112N	SURFACE MOUNTING BRIDGE HINGE		X	X	X		20