


ADDITIONAL LOCKING MECHANISMS AP001



Functions

The rod and spring latches kit is used to create additional locking points on the door.

Online data sheet



Technical Features

The kit of rods and spring latches for making additional lock points on the door is available in two versions:



- top/bottom for standard doors and fire doors, in a short version and long version. Ideal for one-sash doors that you want to close with greater security than with the lateral system or for the secondary sash of a two-sash door
- side for standard doors and fire doors, in a short version and long version. Ideal for single leaf doors where you do not include floor striker plates or for tall doors where it is difficult to make the top lock point.

The kits consist of:

- the spring latches for top/bottom (A) or lateral (B) fastening mechanisms
- the threaded rods (C)
- the rod covering (D)
- the floor striker and the upper striker with their shims for the top/bottom version (E)
- the strikers with their shims for the side version (F)
- fixing components (screws, bushings, washers)

Materials

Mechanisms in zinc plated steel
 Painted steel mechanism protection plug
 Spring latch in stainless steel
 Threaded rods in zinc plated steel
 Painted steel rod casing
 Screws and fixing elements in zinc plated steel
 Top/side striker in zamak and polyamide shims

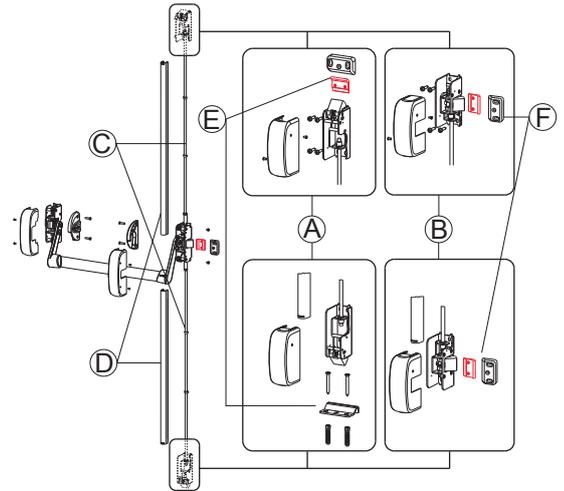

| Item code | Description | Locking mechanism type | Version | Sash height [mm] | Strikers provided | Base Raw | Anodised Elox | Painted | Trend/Gold Brass | Pieces per pack |
|-----------|--|-------------------------------|---------|-------------------------|---|----------|---------------|---------|------------------|-----------------|
| 07315 | FIRE-RATED ADDITIONAL LOCKING MECHANISMS | TOP/BOTTOM (2 LOCKING POINTS) | SHORT | up to 2640 mm | upper and floor in stainless steel | | | X | | 1 |
| 07316 | FIRE-RATED ADDITIONAL LOCKING MECHANISMS | TOP/BOTTOM (2 LOCKING POINTS) | LONG | from 2641 mm to 3150 mm | upper and floor in stainless steel | | | X | | 1 |
| 07317 | FIRE-RATED ADDITIONAL LOCKING MECHANISMS | LATERAL | SHORT | up to 2640 mm | side elements in stainless steel | | | X | | 1 |
| 07318 | FIRE-RATED ADDITIONAL LOCKING MECHANISMS | LATERAL | LONG | from 2641 mm to 3150 mm | side elements in stainless steel | | | X | | 1 |
| 07835N | ADDITIONAL FASTENING MECHANISMS | TOP/BOTTOM (2 LOCKING POINTS) | SHORT | up to 2640 mm | upper in zamak and floor in stainless steel | | | X | | 1 |
| 07836N | ADDITIONAL FASTENING MECHANISMS | TOP/BOTTOM (2 LOCKING POINTS) | LONG | from 2641 mm to 3150 mm | upper in zamak and floor in stainless steel | | | X | | 1 |
| 07837N | ADDITIONAL FASTENING MECHANISMS | LATERAL | SHORT | up to 2640 mm | side elements in zamak | | | X | | 1 |
| 07838N | ADDITIONAL FASTENING MECHANISMS | LATERAL | LONG | from 2641 mm to 3150 mm | side elements in zamak | | | X | | 1 |