

TWIN CATCH



Functions

Device for closing bottom-hung windows for front mounting, it requires no machining on the profile.

Online data sheet




Technical Features

Quick fixing on the sash channel by means of contrast grub screws. The TWIN catch is compression adjustable on the seals. A lever control is available for use in conjunction with the corresponding supports. The lever actuates the opening of the catch but it is not snap fitting on the base. This enables using it as if it were an away lever: to open the bottom-hung window you will need to insert the lever into place. Once opened the lever can be extracted from the base. The use of closing plugs, on bottom-hung windows with a number of TWIN catches connected together by a GIESSE antipanic bar, enables closing and simultaneously fixing the bar to the catches.


Materials

Coupling tooth and bottom recess in polyamide
Support for tooth and catch body in zamak
ABS/polycarbonate catch mechanism
Stainless steel screws, grub screws and spring
Polyamide caps




Bar application

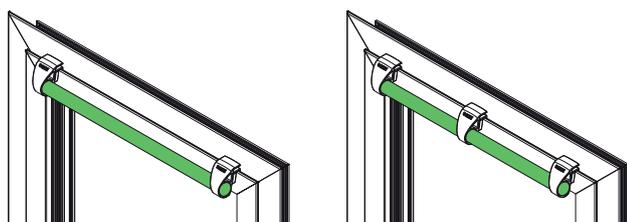

Lever Away (1) and support (2)



Bar-closing cap application

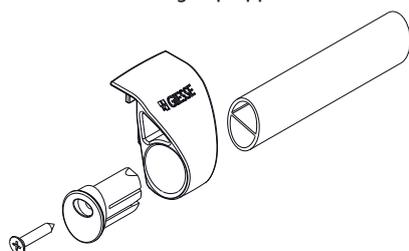

Item code	Description	PROFILE CROSS - SECTION	A (mm)	B (mm)	C (mm)	Length (mm)	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
01704	TWIN CATCH	C001-C002-C003-C004-C005-C006	7 ÷ 10 mm	+ 2.1 mm	+ 1.4 mm	-	X		X	X	40
0170601	TWIN CATCH	C007-C008	8 mm	+ 1.4 mm	+ 1.4 mm	-	X		X	X	40
02317	TWIN BAR CLOSING PLUG	-	-	-	-	-			X		10
07843	HANDLE BAR	-	-	-	-	950			X		1
07844	HANDLE BAR	-	-	-	-	1150			X		1
07845	HANDLE BAR	-	-	-	-	1450			X		1