



LOCKS WITH SPRING LATCH

Functions

Central lock with front closing, slip-on version for aluminium uprights, with adjustable spring latch and tilting bolt.

Online data sheet




Technical Features

Lock compatible with European profile cylinders, has a burglar-proof tilting bolt and a reversible spring latch (RH or LH), adjustable from 10 to 15 mm. Bolts operated with the cylinder. Spring latch operated with the cylinder and with the 8 mm handle spindle. Cylinder handle C/C distance 85 mm. Bolt with thickness of 10 mm and minimum protrusion of 24 mm. Spring latch with 10 to 15 mm protrusion

Materials

Lock cover plate and case plate in zinc plated steel
 Flat front in stainless steel
 Spring latch and bolts in nickel-plated steel
 Polyamide cylinder machining cover studs
 Zinc plated steel cylinder fixing screw
 Lock fixing screws in stainless steel

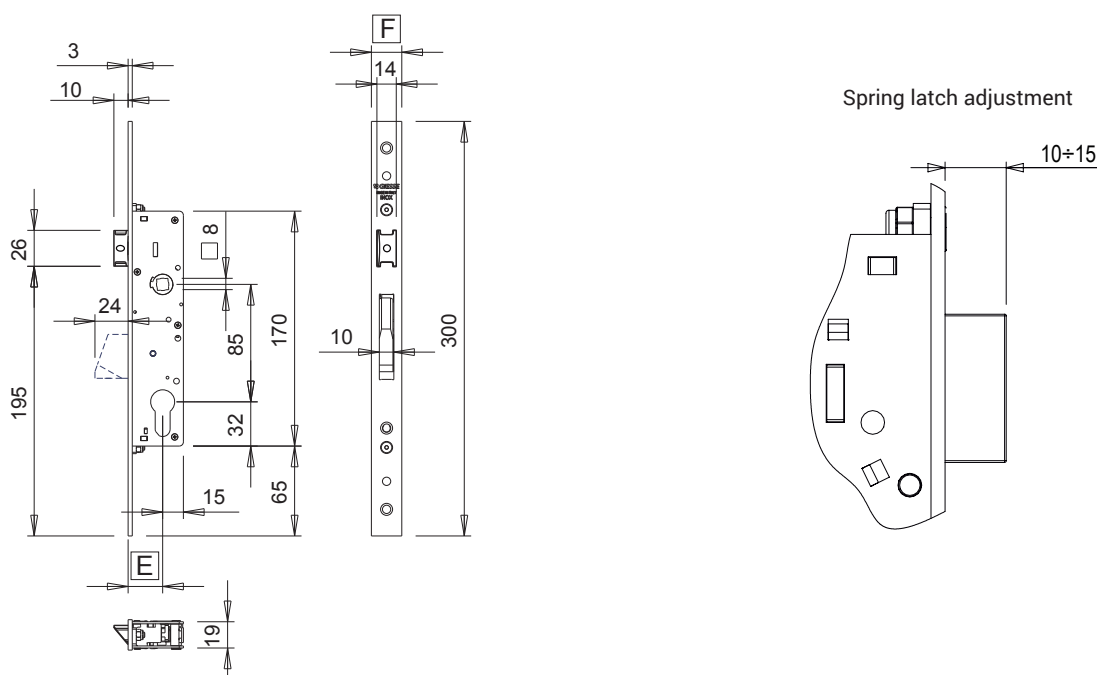

Item code	Description	Backset E [mm]	Front width F [mm]	Compatible counterplates	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
0461301	CENTRAL LOCK WITH SPRING LATCH	25	22	04630 - 04639 - 04859 - 04860	X				10
0461401	CENTRAL LOCK WITH SPRING LATCH	30	22	04630 - 04639 - 04859 - 04860	X				10
0461501	CENTRAL LOCK WITH SPRING LATCH	35	22	04630 - 04639 - 04859 - 04860	X				10
0461901	CENTRAL LOCK WITH SPRING LATCH	25	24	04630 - 04639 - 04859 - 04860	X				10
0462001	CENTRAL LOCK WITH SPRING LATCH	30	24	04630 - 04639 - 04859 - 04860	X				10
0462101	CENTRAL LOCK WITH SPRING LATCH	35	24	04630 - 04639 - 04859 - 04860	X				10