

## LOCKS WITH DEAD BOLT AND SPRING LATCH



### Functions

Central lock with front closing, slip-on version for aluminium uprights, with spring latch and sliding bolt.

Online data sheet



### Technical Features

Lock compatible with European profile cylinders, has a dead bolt and a reversible spring latch (RH or LH).

Bolts operated with the cylinder.

Spring latch operated with the cylinder and with the 8 mm handle spindle.

Cylinder handle C/C distance 85 mm.

Dead bolt with thickness of 10 mm and protrusion of 15 mm.

10 to 13,5 mm adjustable spring latch.

### Materials


Lock cover plate and case plate in zinc plated steel

Flat front in stainless steel

Nickel plated brass spring latch and bolt

Nickel-plated steel bolt

Zinc plated steel cylinder fixing screw

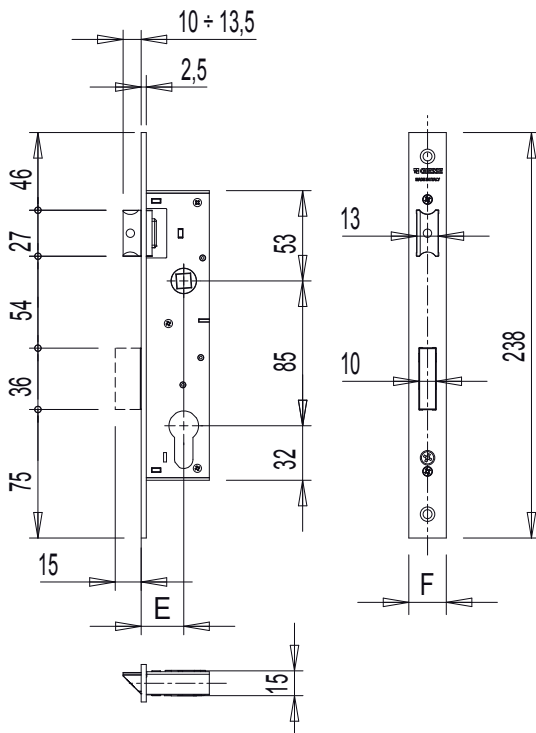

Item code	Description	Backset E [mm]	Front width F [mm]	Compatible counterplates	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
0763001	CENTRAL LOCK FRONT E.25 mm	25	22	0465801	X				1
0763101	CENTRAL LOCK FRONT E.30 mm	30	22	0465801	X				1
0763201	CENTRAL LOCK FRONT E.35 mm	35	22	0465801	X				1