



MULTIPOINT LOCKS FLAT FRONT

Functions

Multipoint lock with central lock and two additional locks, flat front plate, with pivoting bolt and spring latch

Online data sheet




Technical Features

Lock compatible with European profile cylinders, has burglar-proof pivoting bolts and a reversible spring latch (RH or LH).
Bolts operated with the cylinder.
Spring latch operated with the cylinder and with the 8 mm handle spindle.
Cylinder handle C/C distance 85 mm.
Bolts with thickness of 10 mm and minimum protrusion of 24 mm.
Spring latch with 10 mm protrusion.

Materials

Lock cover plates and case plate in zinc plated steel
Flat front in stainless steel
Spring latch and bolts in nickel-plated steel
Zinc plated steel cylinder fixing screw
Lock fixing screws in stainless steel

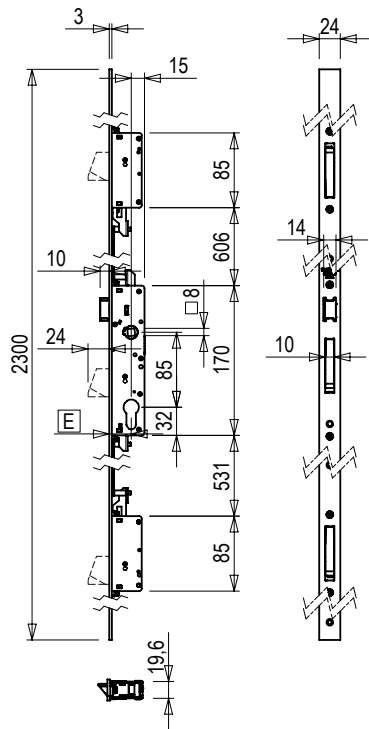

| Item code | Description | Backset E [mm] | Front width [mm] | Compatible counterplates | Base Raw | Anodised Elox | Painted | Trend/Gold Brass | Pieces per pack |
|-----------|---------------------------------|----------------|------------------|--------------------------|----------|---------------|---------|------------------|-----------------|
| 04854 | MULTIPOINT LOCK WITH FLAT FRONT | 30 | 24 | 04861 - 04862 | X | | | | 1 |
| 04855 | MULTIPOINT LOCK WITH FLAT FRONT | 35 | 24 | 04861 - 04862 | X | | | | 1 |