
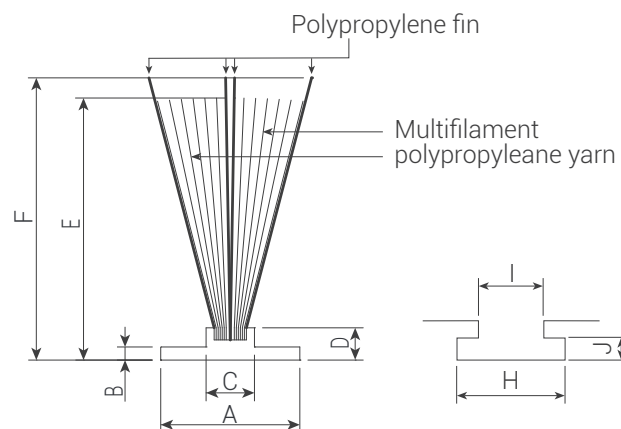


G3-QF (QUADRAFAN): EXTRUDED BRUSH PILE SEALS

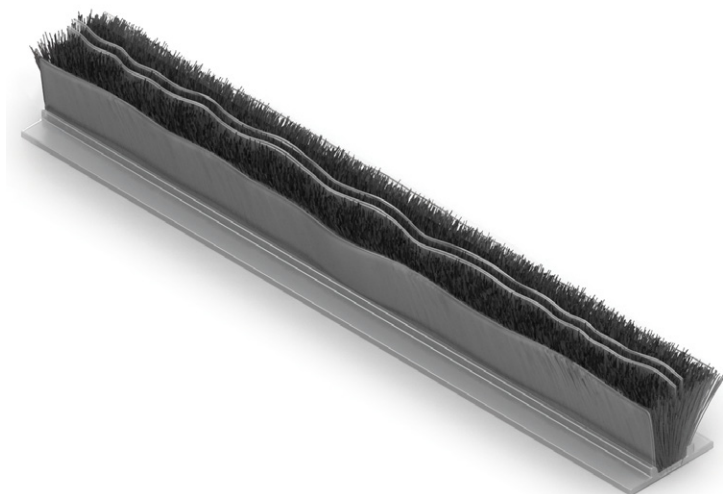

Soft silicone treated multifilament yarn on an extruded base. Guaranteed on centre pile, more suitable for machine insertion.

With non woven centre fin for improved weather sealing of sliding windows and doors.

Recommended compression:

- Brush pile height from 6.0 to 6.5 mm: 10% to 20%.
- Brush pile height from 7.0 mm to 12 mm: 15% to 25%.

	4,8	6,7	6,9
H	5,3	7,5	7,7
I	3,2	3,2	3,2
J	1,3	1,3	1,3


Minimum clearance recommended: +0.5 mm of backing width chosen

TECHNICAL SPECIFICATION

STANDARD SOLUTIONS

A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Central and outside Fin height* (≥ 6 mm)	G Brush density (P)
4,8 ± 0,2 mm	0,65 ± 0,1 mm	2,5 ± 0,2 mm	1,2 ± 0,2 mm	6 ≤ E ≤ 10 mm (+0,50/-0,50 mm with 0,50 mm intervals)	Level or E+1 mm (+0,50/-0,50 mm)	4P
6,7 ± 0,2 mm				10 ≤ E ≤ 12 mm (+0,50/-0,50 mm with 1 mm intervals)		
6,9 ± 0,2 mm						

Multifilament pile yarn colours (≈ RAL)



*With optional quiet non-woven (NW) fin

NW fin Colours (≈ RAL)

