
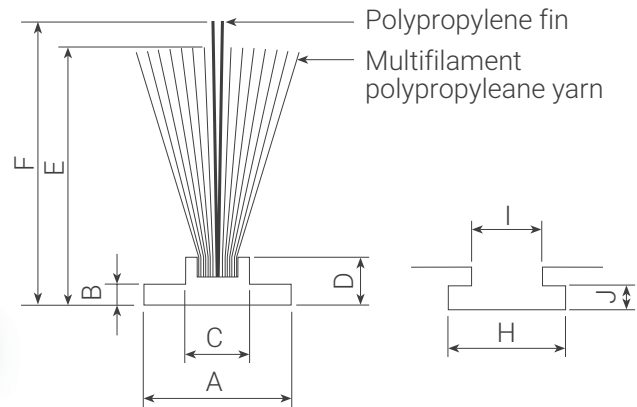


G3: EXTRUDED BRUSH PILE SEALS

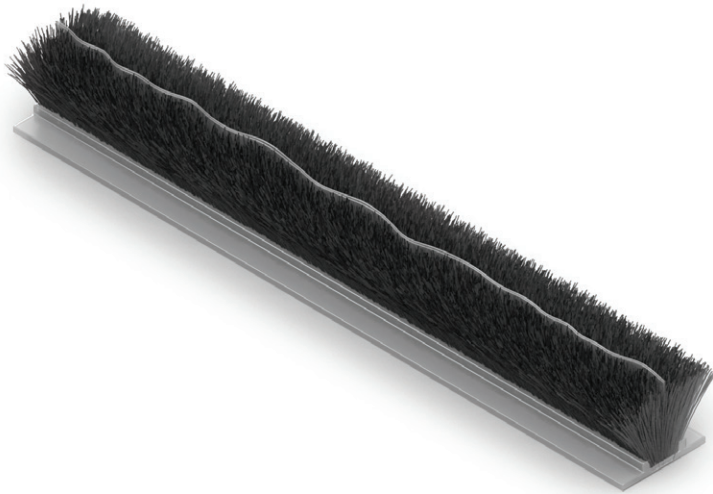

Soft silicone treated multifilament yarn on an extruded base. Guaranteed on centre pile, more suitable for machine insertion.

With clear centre fin for improved weather sealing of sliding windows and doors. Optional adhesive backing.

Recommended compression:

- Brush pile height from 4.0 to 5.0 mm: 5% to 10%.
Fin should be plus 1 mm
- Brush pile height from 5.5 to 6.5 mm: 10% to 20%.
Fin either level or plus 1 mm
- Brush pile height from 7.0 mm to 11 mm: 15% to 25%.
Fin either level or plus 1 mm
- Brush pile height from 12.0 mm and above: 15% to 25%.
Fin level only


	4,8	6,7	6,9
H	5,3	7,5	7,7
I	3,2	3,2	3,2
J	1,3	1,3	1,3

Minimum clearance recommended: +0.5 mm of backing width chosen

TECHNICAL SPECIFICATION

STANDARD SOLUTIONS						
A Backing width*	B Backing thickness	C Directors width	D Directors height	E Brush height	F Fin height** (≥ 5 mm)	G Brush density (P)
4,8 ± 0,2 mm 6,7 ± 0,2 mm 6,9 ± 0,2 mm	0,65 ± 0,1 mm	2,5 ± 0,3 mm	2,3 ± 0,2 mm	4 ≤ E ≤ 5 mm (+0,50/-0,50 mm with 0,50 mm intervals)	E+1 mm (+0,50/-0,50 mm)	4P
				5,5 ≤ E ≤ 8 mm (+0,50/-0,50 mm with 0,50 mm intervals)	Level or E+1 mm (+0,50/-0,50 mm)	
				8 ≤ E ≤ 12 mm (+0,50/-0,50 mm with 1 mm intervals)	Level only (+0,50/-0,50 mm)	
				12 ≤ E ≤ 20 mm (+0,50/-0,50 mm with 1 mm intervals)	Level only (+0,50/-0,50 mm)	

Multifilament pile yarn colours (≈ RAL)



*With optional hot-melt adhesive (HM) • Note: total height will increase up to 0,5 mm if hot-melt requested

**With optional quiet black non-woven (NW) fin

