
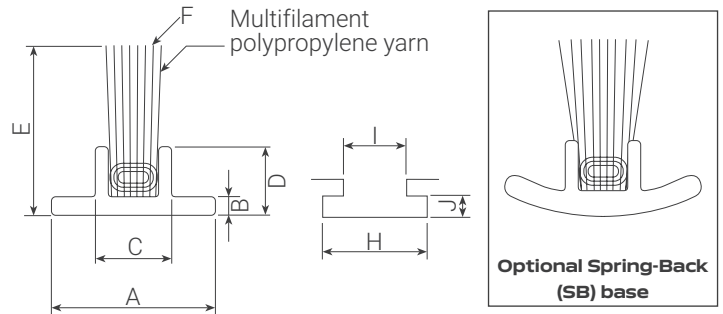


POWER-PILE (PW): EXTRUDED BRUSH PILE SEALS

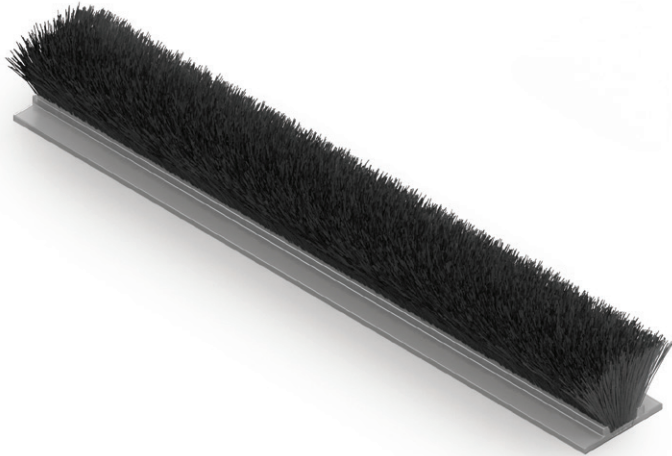

Soft silicone treated multifilament pile yarn on an extruded base with upstanding directors. Guaranteed on centre pile, more suitable for machine insertion. Optional adhesive backing.

Recommended compression:

- Brush pile height from 3.0 to 5.0 mm: 5% to 10%
- Brush pile height from 5.5 to 6.5 mm: 10% to 20%
- Brush pile height from 7.0 and above 15% to 25%


	4,8	6,7	6,9
H	5,3	7,5	7,7
I	3,2	3,2	3,2
J	1,3	1,3	1,3

Minimum clearance recommended: +0.5 mm of backing width chosen

TECHNICAL SPECIFICATION

STANDARD SOLUTIONS					
A Backing width*	B Backing thickness	C Directors width	D Directors height	E Brush height	F Brush density (P)
4,8 ± 0,2 mm	0,65 ± 0,1 mm	2,5 ± 0,3 mm	2,4 ± 0,3 mm	5,0 ≤ E ≤ 8,0 mm (+0,50/-0,50 mm) with 0,50 mm intervals	4P
6,7 ± 0,2 mm				8,0 < E ≤ 25,0 mm (+0,50/-0,50 mm) with 1,0 mm intervals	
6,9 ± 0,2 mm					

Multifilament pile yarn colours (≈ RAL)



*With optional hot-melt adhesive (HM) • Note: total height will increase up to 0,5 mm if hot-melt requested

