

ARMS FOR CURTAIN WALL-TOP HUNG-SIDE HUNG WINDOWS

GS HD ARMS TYPE C PLUS SUPER



Functions

Pair of self-balancing arms (one right and one left) able to bear the weight of an outward opening side-hung window and hold it in the open position.

Online data sheet



Technical Features

"Type-C Plus Super" GS HD Super Arms are suitable for medium size/weight outward opening (side hung) casement windows (see table). Since the upper part of the arm is asymmetrical, within the pair of arms we will have a right and a left; this asymmetrical geometry of the arm improves the return and closing of the sash.

The window opening can also be frictioned by turning the grub screw on the slider.

These articles are equipped with a side adjustment element integrated in the arm. This feature allows micrometric adjustment of the correct positioning of the sash directly on site once installed.

Type-C Plus Super GS HD arms are tested by Giesse for up to life-time 30.000 cycles.

Applicability

"Type-C Plus Super" GS HD Super arms are applicable to profile systems with a gap (sash/frame distance) of 16.5 mm +/- 0.5 mm.




Ask to your sales rep for product availability.


Materials

AISI 304 stainless steel arm;
Slider in polyamide and 304 grade stainless steel
Zamak adjustment element


Side Hung (A: internal, B: external)

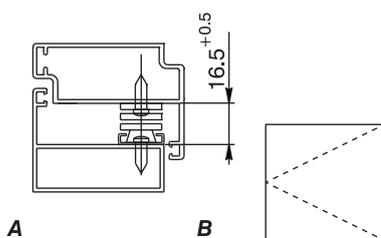

1: Side Hung arm. 2: width adjustment component. 3: frame

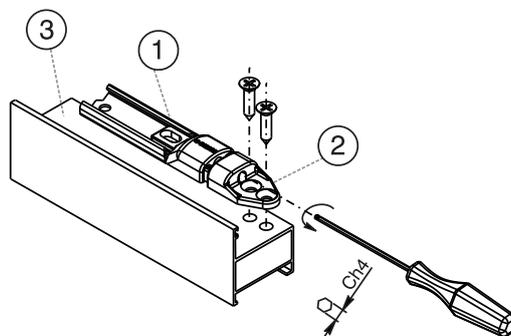

Side Hung

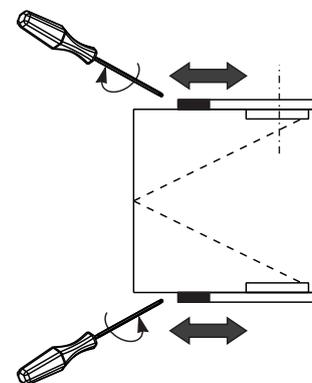

Item code	Description	Permitted type of opening	Bag width	Sash-frame distance (mm)	Arm length (mm)	Maximum opening angle	Maximum permissible height (mm)	Maximum permissible width (mm)	Maximum permissible weight (kg)	Side adjustment	Base Raw	Items per pack
08232	GS HD Super - 10" type C Plus	Side	~23	16,5+0,5	327,5	82	1600	500	32	integrated	X	6
08233	GS HD Super - 12" type C Plus	Side	~23	16,5+0,5	373,5	85	1600	600	38	integrated	X	6
08234	GS HD Super - 14" type C Plus	Side	~23	16,5+0,5	425,5	87	1600	650	40	integrated	X	6
08235	GS HD Super - 16" type C Plus	Side	~23	16,5+0,5	474,5	87	1600	750	42	integrated	X	6
08236	GS HD Super - 18" type C Plus	Side	~23	16,5+0,5	523,5	87	1600	800	45	integrated	X	6