

CHAMPION PLUS MULTILOCK 0-180



Functions

Complete system of multi-lock rods (1 to 3 points) for sliding windows or balcony-doors made of aluminium.

Online data sheet



Technical Features

Available in two versions:

- Backset 15 mm (1 to 3 locking points)
- Backset 15 mm with lock (3 locking points)

All the rods are operated by traditional window handles or recess handles equipped with a 7 mm square pin.

These multi-locks have 3 operating positions:

- 1) 0° CLOSED SASH
- 2) 90° OPEN SASH
- 3) 180° OPEN SASH

The movement of the sash with a 180° handle allows for increased opening (ideal for systems with retractable sash).


NOTE: for the micro-ventilation function, refer to the CHAMPION PLUS LOCKING ROD WITH MICRO-VENTILATION

Depending on the series used, the rods have to be matched with specific coupling kits designed to adapt them to the various shapes of the profile.

The strength of the mushroom nib is greater than 150 kg.

Materials

Zinc-plated steel lift-proof pin and rods
Box for rotor and nibs in zamak

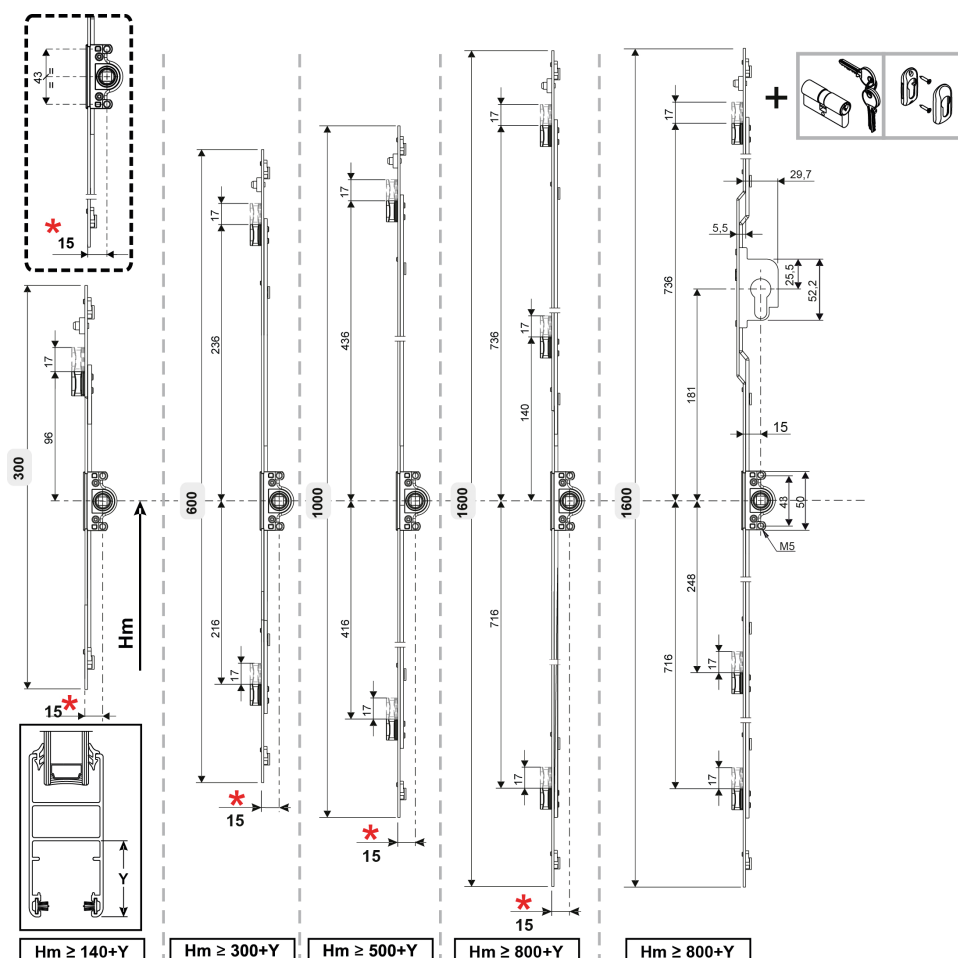

Item code	Description	Backset	Lock	Incorrect Movement Safety Device Compat- ibility	Length	Window handle height	Locking points	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
06478	CHAMPION PLUS MULTILOCK 0-180	15	NO	NO	300	> 140 + Y	1	X				4
06474	CHAMPION PLUS MULTILOCK 0-180	15	NO	NO	600	> 300 + Y	2	X				4
06475	CHAMPION PLUS MULTILOCK 0-180	15	NO	NO	1000	> 500 + Y	2	X				4
06476	CHAMPION PLUS MULTILOCK 0-180	15	NO	NO	1600	> 800 + Y	3	X				4
06477	CHAMPION PLUS MULTILOCK 0-180 WITH LOCK	15	YES	NO	1600	> 800 + Y	3	X				4