

MULTIPOINT DOOR LOCKS U-SHAPED FRONT



Functions

Multipoint lock with central lock and additional locks, front "U" shaped plate, with pivoting bolt and spring latch.

Online data sheet




Technical Features

Lock compatible with European profile cylinders, has burglar-proof pivoting bolts and a reversible spring latch (RH or LH).
 Bolts operated with the cylinder.
 Spring latch operated with the cylinder and with the 8 mm handle spindle.
 Cylinder handle C/C distance 85 mm.
 Bolts with thickness of 10 mm and minimum protrusion of 24 mm.
 Spring latch with 10 mm protrusion.

Materials

Lock cover plates and case plate in zinc plated steel
 Stainless steel "U" front
 Spring latch and bolts in nickel-plated steel
 Zinc plated steel cylinder fixing screw
 Lock fixing screws in stainless steel

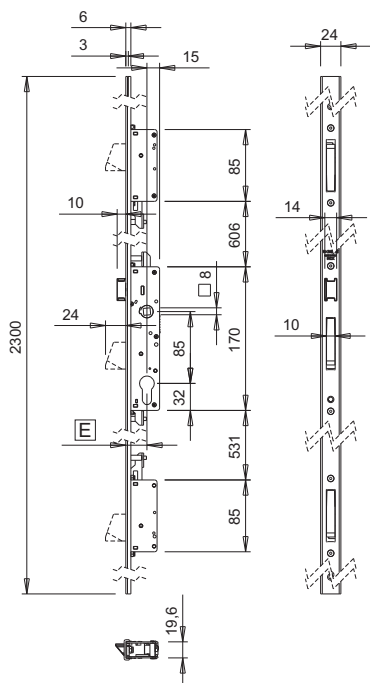

Item code	Description	Backset E [mm]	Front width [mm]	Compatible counterplates	Base Raw	Anodised Elox	Painted	Trend/Gold Brass	Pieces per pack
04850	MULTIPOINT LOCK WITH "U" FRONT	25	24	04861 - 04862	X				1
04851	MULTIPOINT LOCK WITH "U" FRONT	30	24	04861 - 04862	X				1
04852	MULTIPOINT LOCK WITH "U" FRONT	35	24	04861 - 04862	X				1